

# \* Please reset the CMOS settings if the problems occurs such as follows :

- (1) When replacing a new H81 Main Board
- (2) When BIOS setting initialization
- (3) When replacing Backup battery

- Preparation : USB Type\_wire Keyboard


- 1** When the 3 items listed above happened, connect the keyboard and keep pressing the F2 button in order to get into CMOS while booting.  
Select UEFI Defaults in EXIT menu and press Enter button of keyboard in order to change the values.



- 2** Change the value of Restore on AC/Power Loss to "Power On" on Chipset Configuration of Advanced menu.



**3** Select the value of SATA Mode Selection to "IDE" on Storage Configuration of Advanced menu.

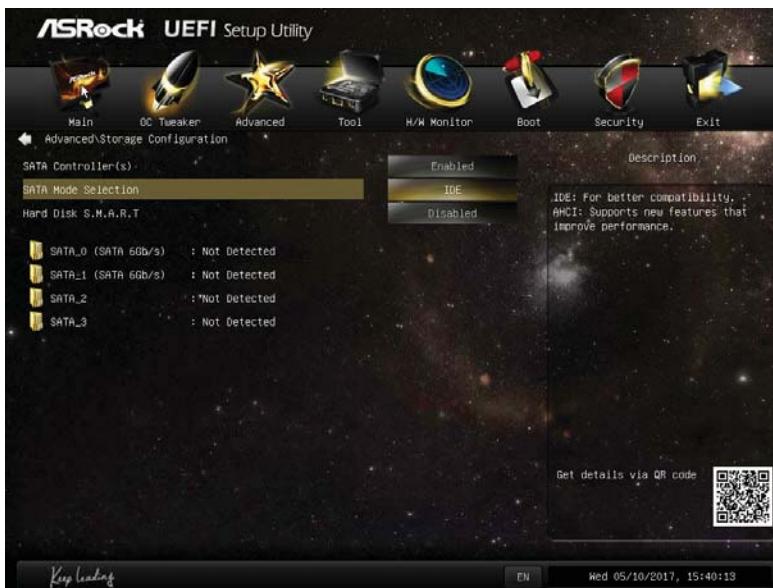

**4** Change the value of USB 3.0 mode to "Disabled" on USB Configuration of Advanced menu.



**5** Select "Save Change" in EXIT menu, and reboot.

